


## COMPLEMENTARY PRODUCTS

### PRODUCT

## PROTECT FACHADAS - AG

### Waterproofing anti-graffiti

- Do not change the color of the treated surfaces.
- Resistant to different atmospheric agents.
- Good results like anti-graffiti additive.

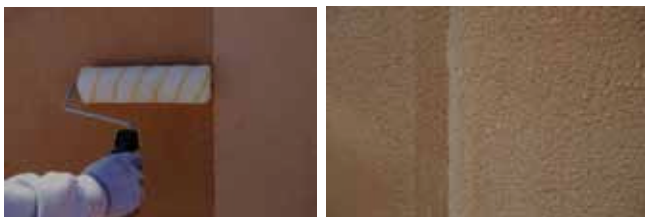

### PRESENTATION /

Can of plastic of 20 kg  
Palets of 480 kg (24 cans)

### COLOR /

Transparent.

### YIELD /

Recommended: 1 kg per 3 sqm for one coat.

### TRANSPARENCY /

Total

### CONSERVACIÓN/ 20-25°C

12 months since manufacture date in original closed container and shelter from weather and moisture.



### DESCRIPTION /

Waterproofing/oil repellent concentrate in base of silanes reagents modify.

### APPLICATIONS /

- Excellent penetration.
- Usable in many products for construction industry such as concrete, brick, grain, tile...
- Permeability to water vapor.

### INSTRUCTIONS /

- The surface must be dry, healthy, clean and free from dust.
- The product it's prepared for a direct application.
- Can be diluted with universal solvent.
- Apply in sunny days.
- Effectiveness test: 24 hours alter the application and dry surface.

### FEATURES /

- Application temperature: 5-30°C
- Inflammation temperature: 8°C
- Density: 25 °C 0.84 g/cm<sup>3</sup>
- Flammable product

\*All the information above has been obtained from tests performed under standard conditions and may vary depending on the conditions of placement.

### COMMENTS /

- Avoid splashing to eyes or mucous membranes and skin contact.
- Use security glasses and gloves.



[www.pavistamp.com](http://www.pavistamp.com)

Customer Service: +34 902 158 743