



## Multi-layer system ecological for floor renovation and decoration

### PAVIDUR MULTI-LAYER

#### DESCRIPTION /

Union resin for multi-layer system between aggregated and mortars.

#### COMMENTS /

- Do not add water or any other additive to the mortar.
- Treat the singular areas (fissures) with the appropriate mesh.
- Dry time varies according the temperature and moisture.
- Do not apply with risk of rain, freeze or direct sun, strong wind...

**AVOID CONTACT WITH EYES AND SKIN, USE SECURITY GLASES AND GLOVES.**

#### USE CHARACTERISTICS /

- Mix life in 20°C: 1-2 hours
- Thickness: between 3-10 cm
- Dry to touch: 6-10 hours
- Pedestrian traffic: 24 hours
- Light traffic: 3-5 days
- Total hardness: 7 days

\*These times can vary considerably depending on room temperature.

#### APPLICATIONS /

- Ecological cladding for renovation of floors and walls.
- Water rain permeable.
- Avoid standing water.
- In terraces, streets pedestrian, sidewalk, pools...
- Without maintenance.

#### FINISHES /

- Asphalt type.

#### APPLICATION RECOMMENDATIONS /

- Always respect the same percentage of **Pavidur** during mix.
- Do not add water to the product.
- Respect the expansion joints.
- Application temperature 5°C to 35°C.



**SYSTEM  
PAVIDUR  
ECOLOGICAL**

#### EXECUTION CONDITIONS /

- On vegetal floor partially removed, levelling and eventually consolidated and clean up through pollution control drainage layer to fulfil the required construction management.
- The existing support should be strong, healthy, and free from dust, paints, oil...
- If you apply on new concrete, it must be completely set ( $\geq 28$  days).


#### HOW TO USE /

Proportion of the mixture: (2 to 1) 2 parts of Component A-1 part of Component B.

Pour the components A and B in the same container, mix during 3 minutes with a mechanical shaker at slow speed.



Mix with the aggregate: manually or with cement mixer (at least 10 minutes)

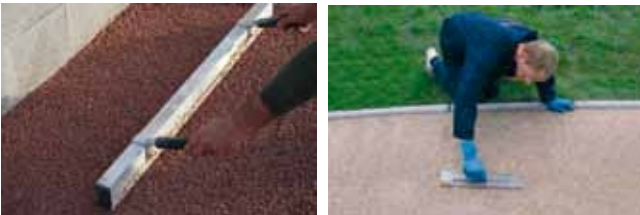

Once you pour the mass over the pavement, plain manually with the appropriated trowel or with trowelled machine.



Final Appearance

#### PRODUCT

### PAVIDUR MULTI-LAYER

#### Multilayer system ecological for floor renovation and decoration

- Colored continuous pavement
- Permeable and breathable.
- Indoor and outdoor.
- Suitable for pool environments
- Range colors

#### PRESENTATION /

##### Pavidur:

Pack de 30 kg

- Component A à 20 Kg
- Component B à 10 Kg

##### Aggregated:

Bag of plastic 30 kg

Pallets of 1200 kg (48 bags)

#### COLORS /

Colors Range 14 colors

#### YIELD /

Aggregated: 15 kg/m<sup>2</sup> y 1 cm thickness

-Pedestrian traffic and light: 1 kg Pavidur and 50 kg Aggregated

#### CONSERVATION /

##### Pavidur:

12 months since manufacture date in original closed container and shelter from the weather and moisture.

**CLEAN THE TOOLS WITH SOLVENT**

PAVIDUR COLORS



**PAVIDUR SYSTEM  
COLORS**



**MARFIL 5/9**



**MADERA 5/9**



**BLANCO 5/9**



**ROSA 5/9**



**NEVADO 5/9**



**VETEADO 5/9**



**GRIS MACAEL 5/9**



**AMARILLO 5/9**



**ROJO 5/9**



**VERDE 5/9**



**NEGRO 5/9**



**ARIDO RIO 8/12**



**RAIN WATER ABSORPTION**